



昆明康倍特输送带有限公司 KUNMING CONVEYOR BELT CO., LTD.

Address: Room 1605-07, Zhongjiao South Asia Headquarter Building, Wujiaaba, Kunming 650000, China
TEL: 0086 871 65136470, 65136474 FAX: 0086 871 65136492
Website: www.kmbelt.com.cn Email: kmbelt@163.com, sales@kmbelt.com.cn


TYPE

EP300/3:0+4.0SG/9.0B

GENERAL CHARACTERISTICS:

SUITABLE FOR MOST OF PRODUCTION LINES

ESPECIALLY FOR SLOPE TRANSPORTATION

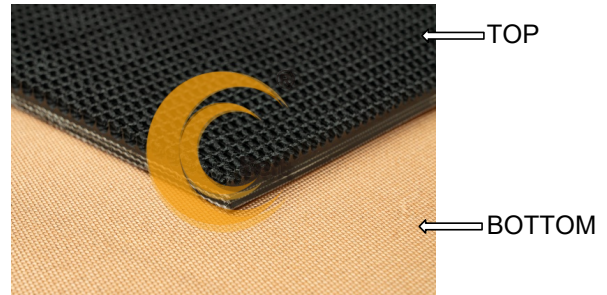

TECHNICAL CHARACTERISTICS :

Total Thickness	9.0 mm
No. of Plies	3
Fabric	EP Fabric
Weft	Flexible
Weight	8.5 kg(s)/m ²
Working Temperatures	-30 °C to + 80 °C
1. Top Cover	
Thickness	4.0 mm
Material	Rubber
Color	Black (B)
Surface	Super Grip (SG)
Hardness	65 ShA
2. Internal Layer(s)	
Material	Rubber
Color	Black (B)
3. Bottom Cover	
Thickness	-
Material	-
Color	Natural
Surface	Bare Fabric
Hardness	-
Anti-static Yarn	-

BELT TENSION :

Tensile Strength	300 N/mm
Max. Suggested Load	23 N/mm
Working Load 2% Elongation	25 N/mm

FRICITION COEFFICIENTS ON:


Smooth Stainless Steel	0.18
------------------------	------

REMARKS

Standard Width	1800mm
----------------	--------

MINIMUM PULLEY DIAMETERS:

Front Flexing	100 mm
Back Flexing	120 mm



CONVEYOR FRAME:

Horizontal Rollers	Yes
Slider Bed	Yes
Troughed Application	Yes

SPECIAL CHARACTERISTICS:

Food Grade	No
Oil Resistant	No
Flame Retardant	No
Surface Antistatic	No
Cold Resistant	No

JOINING INSTRUCTIONS :

Joining Method	Steel Fastener
----------------	----------------